



SALA extension strap, for fall arrest blocks

Description

Sala extension strap CE marked and conforming to the standard EN354:2002.

The strap is equipped with a triangular screw link* for attachment to a harnesses fall arrest point.

Manufactured from highly resistant polyester webbing, and has a length of 40cm including the triangular screw link.

The purpose of this extension strap is to elongate the rear fall arrest attachment point of a harness to make it easier to attach, and detach a connector of a retractable fall arrest device.

Warning - This item is only to be used as an extension strap, for direct connection between a Sala harnesses Fall arrest anchorage point, and a Sala retractable Fall arrest device. It should not in any circumstances be connected to a lanyard.

Main features

- Easier attachment and detachment of retractable fall arrest devices.
- Highly resistant polyester webbing
- CE marked – EN354:2002
- Comes with semi permanent triangular screw link*
- Individual serially numbered, for quality control purposes

Applications

Designed for most fall arrest situations, whilst using a retractable fall arrest block.

- Pitched roof
- Flat roof
- Scaffolding/steel work
- Structural steel



Associated Products

This strap is for use with the following products

- A Sala full retractable fall arrest devices conforming to EN360

* "Screw links" or semi permanent links are not designed to be opened during the course of work. They should always be closed with the addition of a thread locking compound, using a suitable spanner.



Capital Safety Group www.capitalsafety.com

France Tel +33 (0)4 97 10 00 10 Email information@capitalsafety.com

UK Tel +44 (0)1928 571 324 Email info@csgne.co.uk



KM4040W


(N-L040W)



SALA extension strap, for fall arrest blocks

Technical specification

- Yellow lanyard webbing - 27mm width, 100% Polyester, Breaking strength >3000 daN
- Thread - High strength, 100% Polyester
- Triangular screw link * - Breaking strength > 2750 daN, 8mm diameter, Steel with white zinc plating finish.
- Individual serially numbered
- Net Weight - 140g
- Conforms to standard – EN354:2002
- System breaking Strength >15KN

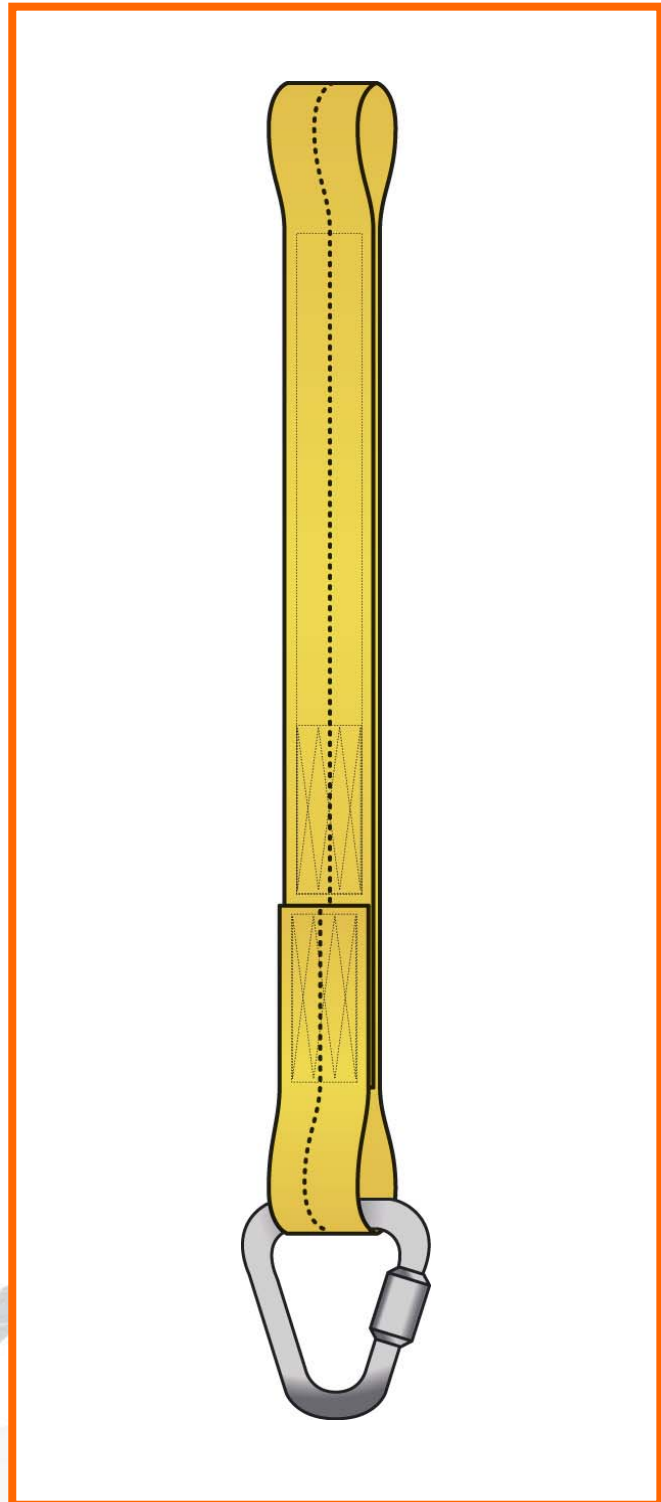

CE

Capital Safety Group reserves the right to modify the specification of this product without prior notice. Descriptions, colours, pictures and diagrams herein appear for guidance only.